

ZENVIDA

PRODUCT NAME : **Zenvida Lamp**
SKU : **275-PNDTL01-NAT**
TEL : **855-349-4327**
HTTP : **bit.ly/ZENVIDA**
EMAIL : **priority@zenvidahome.com**

Don't Panic!
We are here for you.

STOP

Call 855-349-4327 9AM-5PM EST M-F

OR

email: priority@zenvidahome.com
anytime for help with this product

Reaching out via product review, marketplace email, social media or leaving seller feedback may cause a delay in response. If you have questions about this product or need anything, please reach out. You are our priority!

FEATURES

Article Code : LINEOD 18W

Environment : Indoor

Material : Ash solid wood, Powder coated steel

DIMENSIONS

Product dimensions

Length : 1182mm

Width : 28mm

Height : 40mm

Hanger length : 1000mm



LUMINAIRE


Watt : 18W

Voltage : 90-265V

Color Kelvin : Warm white

TECHNICAL DRAWINGS

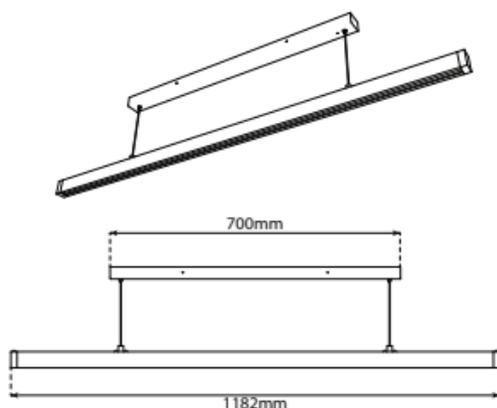

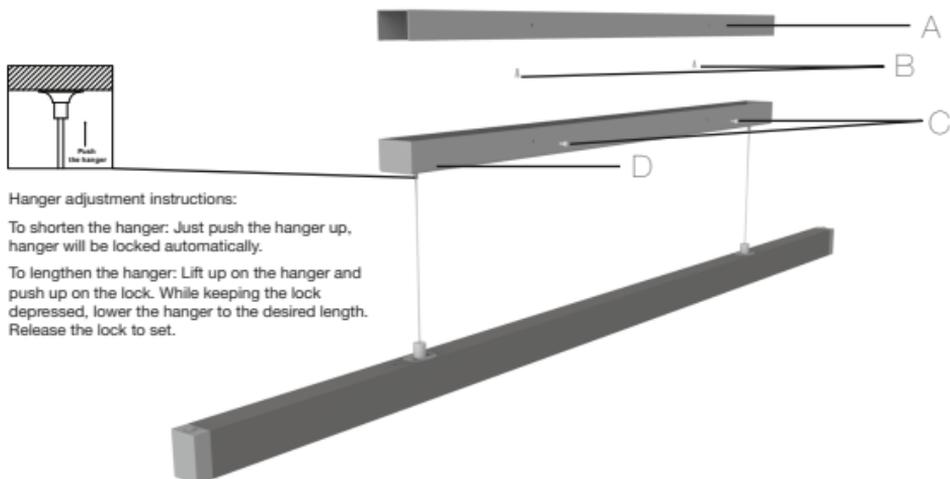

Hanger adjustment instructions:

To shorten the hanger: Just push the hanger up, hanger will be locked automatically.

To lengthen the hanger: Lift up on the hanger and push up on the lock. While keeping the lock depressed, lower the hanger to the desired length. Release the lock to set.

Step 1: Disconnect the power by turn it off at the circuit breaker panel.

Step 2: Take the mounting plate (A) and install it to the ceiling with suitable screw and anchors (B) (not included).

Step 3: Make appropriate electrical connections using wire nuts. Make the wiring connections with the local electrical code.

Step 4: Place connections in canopy (D).

Step 5: Attach part (D) including canopy, hanger and lamp to mounting plate with canopy screw (C) provided.

Step 6: Adjust the hanger length as desired. (See picture description)

Step 7: Restore power at the circuit breaker panel.



Step 1: Connect the bare copper ground wire (yellow and green) from fixture to supply ground.

Step 2: Connect the brown (live wire) fixture lead to the (+) LINE supply lead.

Step 3: Connect the blue (neutral wire) fixture lead to the (-) COMMON supply lead.